



UNI 31 S


| UNI-S |

LOW TEMP FREEZER FOR FROZEN FOOD

Low temperatures are often essential when you need to serve special ice cream or special kind of food. The UNI-S offers a unique combination of -35°C and glass sliding lids.

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Digital controller
- Acoustic alarm
- Down to -35°C
- Digital controller with potential free contact, (which makes it possible to connect it to an external alarm.)
- Accessories including baskets - see page 66
- Graphics (option)

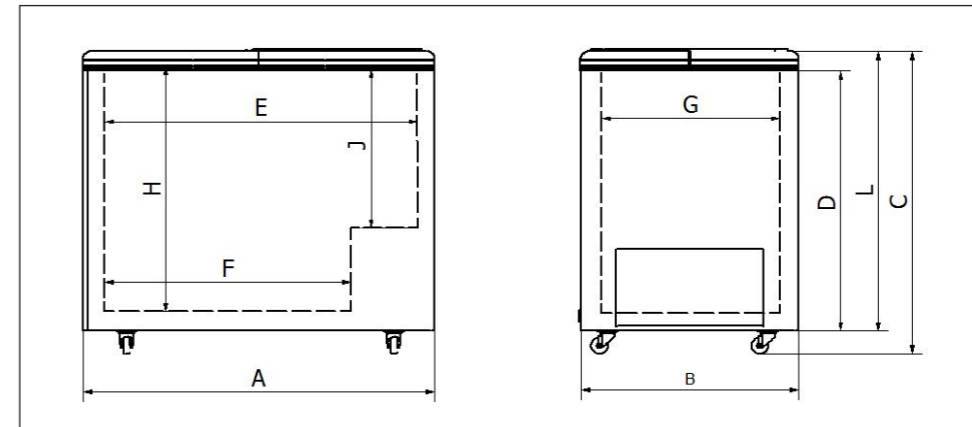

UNI 11 S



UNI 21 S



UNI 31 S



	UNI 11 S	UNI 21 S	UNI 31 S
Climate Class 4	4	4	4
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	140	243	322
Net volume, litres	116	203	270
Temperature range inside unit	-10 to -35	-10 to -35	-10 to -35
Refrigerant: R290	Yes	Yes	Yes
Energy consumption / 24 h (kwh)	1,89	2,98	3,08
Annual energy consumption kwh	690	1088	1124
Energy efficiency index	62,1%	77,9%	69,5%
Energy class	D	E	E
Input power (watt)	190	305	340
DIMENSIONS			
External dimensions (WxDxH)	725x655x916	1055x655x916	1305x655x916
Internal dimensions (WxDxH)	520x450x710	850x450x710	1100x450x710
Dimension A	725	1055	1305
Dimension B	655	655	655
Dimension C	916	916	916
Dimension D	780	780	780
Dimension E	520	850	1100
Dimension F	320	650	900
Dimension G	450	450	450
Dimension H	710	710	710
Dimension J	460	460	460
Dimension L	846	846	846
Insulation (mm)	100	100	100
ACCESSORIES			
Dividers	Optional	Optional	Optional
Baskets	Optional	Optional	Optional
Castors	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional
Lock	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.
Potential free contact	Yes	Yes	Yes
OTHER DATA			
Outer cabinet	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional
UL / DOE approval	Yes	Yes	Yes
Potential free contact	Yes	Yes	Yes
Net weight, kg	46	59	67
Gross weight, kg	49	62	71
SHIPPING			
20' cont. Capacity	42	30	24
40' cont. Capacity	90	64	50
Standard Trailer capacity	102	74	60